



PLANRAY
- Trace Heating Automation -

PB4S

TECHNICAL DATA





 Function

PlanControl PB4S Slave concentrator unit:

- Transmits communication between power units and control units
- Supply supply voltage to power units

 Electrical data

Supply voltage:	24 VDC
Power consumption:	1,6W / 65mA
Bus connection:	4x RS485 to the power units

 Mechanical data

Dimensions:	Height: 100 mm, Width: 17,5 mm, Depth: 114,5 mm		
Weight:	148 g		
Material:	Polyamide PA6.6		
IP-rating:	IP20		
Installation:	Screw fastening		
LED-indicating:	Port transaction Transaction failure to power units		
Connectors:	Gates 1-4:	8-napainen RJ-45	
	Operating voltage:	1,5mm ² plug/screw terminal, wire A = 0,14-1,5mm ²	


 Electromagnetic compatibility

Immunity:	EN 61000-6-2
Emission:	EN 61000-6-4

 Environmental conditions


Operating temperature:	-40... +60 °C
Storage temperature:	-40 ... +70 °C

Bus

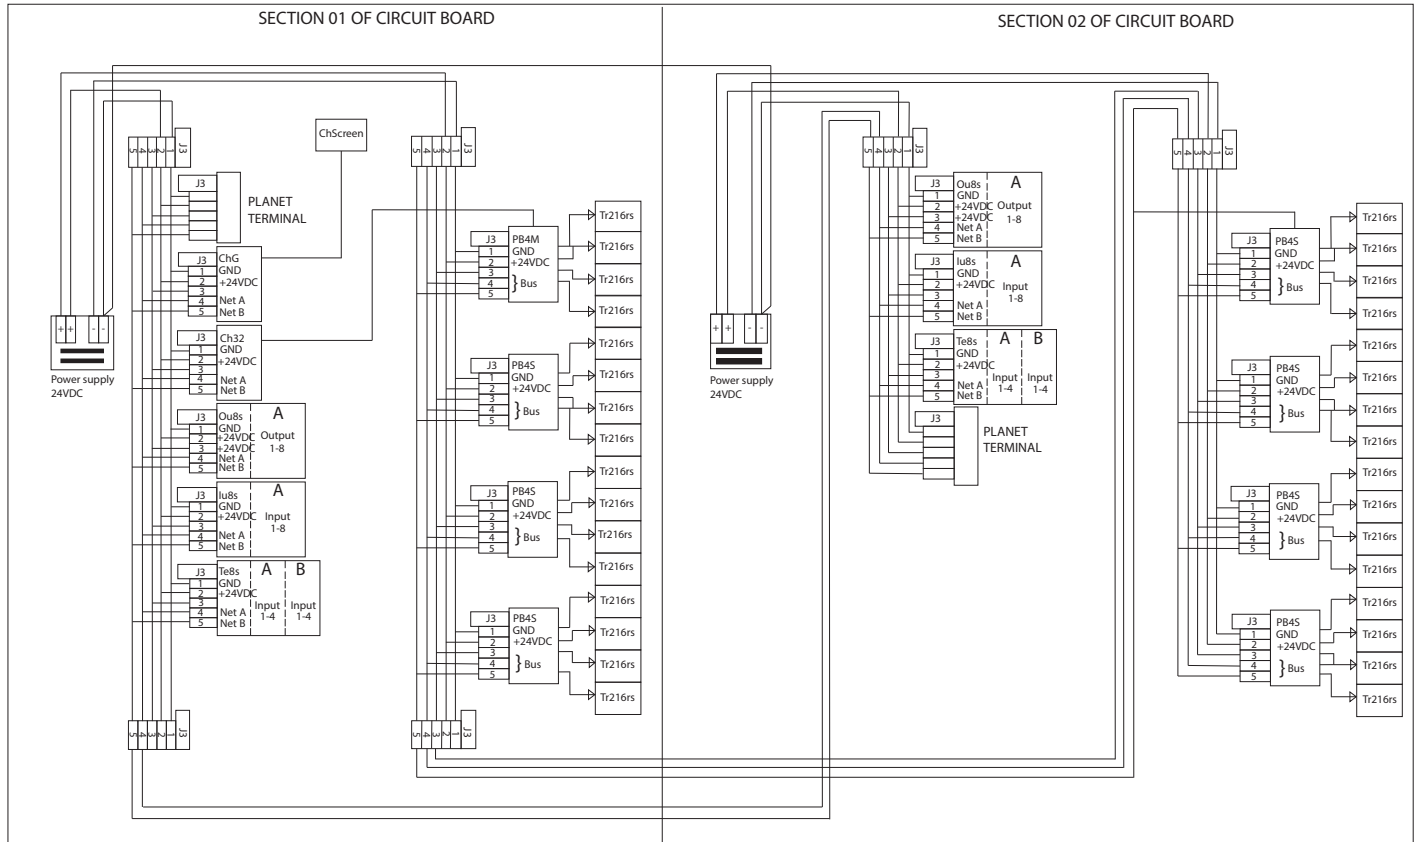

The image shows the connection of the hub units in a system of 32 power units.

Dimension table

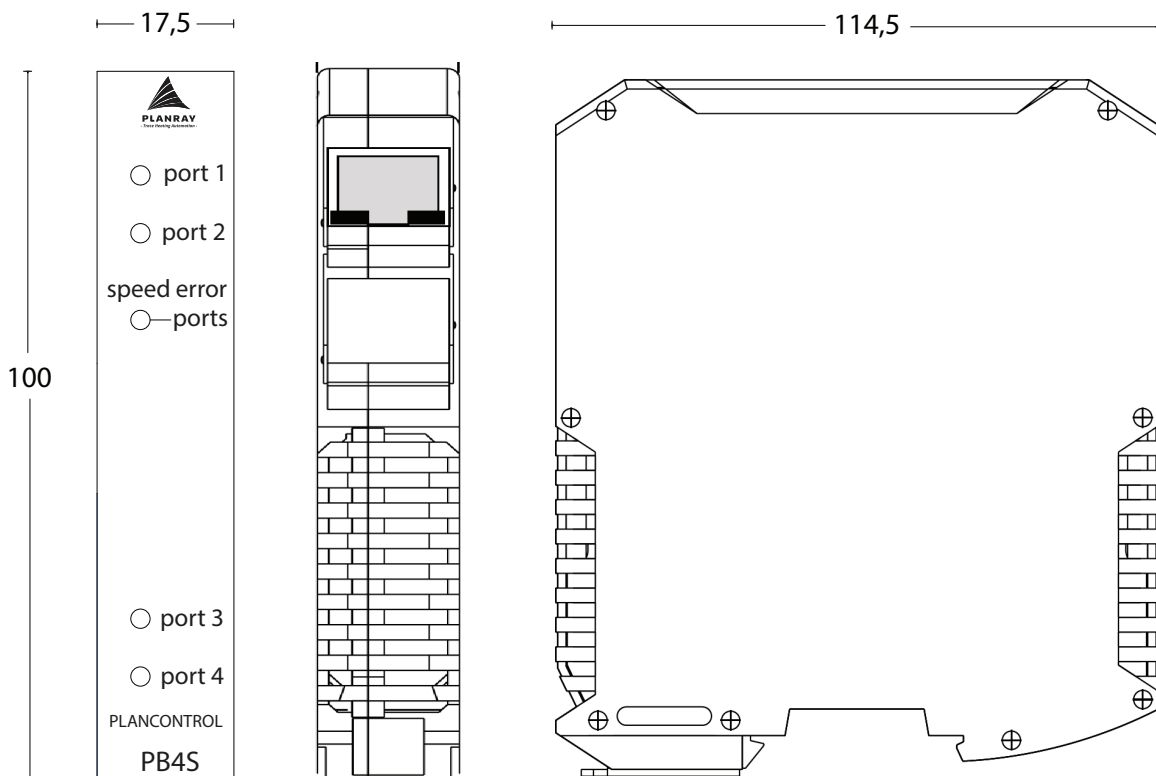

Machine



Manufacturer

Planray Oy
Taitokatu 2, FI-87400 Kajaani, Finland
Tel. +358 (0) 44 597 4743 E-mail: info@planray.com

